

Advances in Power-to-Gas Technologies: Cost and Conversion Efficiency

Gunther Glenk*

Mannheim Institute for Sustainable Energy Studies, University of Mannheim
MIT CEEPR, Massachusetts Institute of Technology
glenk@uni-mannheim.de

Philip Holler

Mannheim Institute for Sustainable Energy Studies, University of Mannheim
philip.holler@uni-mannheim.de

Stefan Reichelstein

Mannheim Institute for Sustainable Energy Studies, University of Mannheim
Graduate School of Business, Stanford University
Leibniz Centre for European Economic Research (ZEW)
reichelstein@uni-mannheim.de

December 2022

*Corresponding author: glenk@uni-mannheim.de

Abstract

Widespread adoption of hydrogen as an energy carrier is widely believed to require continued advances in Power-to-Gas (PtG) technologies. Here we provide a comprehensive assessment of the dynamics of system prices and conversion efficiency for three currently prevalent PtG technologies: alkaline, polymer electrolyte membrane, and solid oxide cell electrolysis. We analyze global data points for system prices, energy consumption, and the cumulative installed capacity for each technology. Our regression results establish that, over the past two decades, every doubling of cumulative installed capacity resulted in system prices coming down by 14–17%, while the energy required for electrolysis was reduced by 2%. Incorporating multiple forecasts of future deployment growth, our calculations project that, in the coming decade, all three technologies will become substantially more economical than previously thought. Specifically, the life-cycle cost of electrolytic hydrogen production is projected to get close to the \$1.0/kg cost target set by the U.S. Department of Energy for the year 2030.

Keywords: learning-by-doing, hydrogen, electrolysis, power-to-gas, energy storage

JEL Codes: M1, O33, Q41, Q42, Q48, Q54, Q55

1 Introduction

In the intensifying debate about alternative pathways for rapid decarbonization, hydrogen is increasingly viewed as a critical building block for storing and flexibly dispatching large amounts of carbon-free energy^{1;2}. Among alternative hydrogen production technologies, Power-to-Gas (PtG) in the form of electrolytic hydrogen has received particular attention³⁻⁵. Large-scale deployment of these technologies, however, is generally expected to hinge on substantial cost declines and energy conversion improvements. To accelerate the pace of these improvements, governments around the world have recently introduced sizeable regulatory initiatives and subsidy programs for the development, deployment, and manufacturing of hydrogen equipment^{6;7}.

This paper projects cost and conversion efficiency improvements for three prevalent PtG technologies: alkaline, polymer electrolyte membrane (PEM), and solid oxide cell (SOC) electrolysis. Our analysis is grounded in a learning-by-doing model that postulates that system prices for electrolyzers and their conversion efficiency decline at a constant rate with every doubling of cumulative installments of the technology in question. Such learning models have proven highly descriptive in the context of solar photovoltaics^{8;9}, onshore wind turbines¹⁰⁻¹², or lithium-ion batteries¹³⁻¹⁵. Scarcity of data has so far limited the estimation of learning curves to alkaline electrolysis¹⁵⁻¹⁸ or to a single equipment manufacturer¹⁹. Some earlier studies estimate the rate of past cost declines of PtG technologies against time,²⁰⁻²² or rely on expert opinions about future cost developments²³⁻²⁵.

Our analysis provides a comprehensive assessment of the dynamics in system prices and energy efficiency for the three PtG technologies by tracking global observations on investment expenditures and energy consumption. This information is linked to capacity installations at facilities commissioned worldwide between 2000–2020. Our estimates return significant and robust learning curves for system prices in the range of 83–86%. Thus, system prices declined by 14–17% compared to the price levels prior to the doubling of cumulative installments. The relatively young SOC technology is projected to show the sharpest price decline at a 17% learning rate. PEM electrolyzers, in contrast, have experienced high capacity growth and a rapid price decline between 2003 and 2020. Here, our estimates yield a relatively slow learning rate of 14%. For conversion efficiency, we estimate that every doubling of cumulative installed capacity reduces the required kilowatt-hours (kWh) per kilogram (kg) of hydrogen produced by approximately 2% across all three technologies.

Our regression results can be extrapolated to yield forecasts for the system prices and conversion efficiencies of the three PtG technologies in question by the year 2030. Even for divergent growth forecasts issued by different industry and policy sources, the extrapolated values fall into a relatively narrow range. These calculations, in turn, lead us to conclude that the *Hydrogen Shot* target by the U.S. Department of Energy⁷ of producing clean hydrogen at a cost of \$1.0/kg by 2030 is ambitious, though not far-fetched. It should be noted, though, that because the variable production cost of electricity will become the dominant component of the life-cycle cost of hydrogen by 2030, we conclude that the attainment of the *Hydrogen Shot* target for electrolytic hydrogen ultimately hinges on the availability of electricity that is both inexpensive and clean.

2 Learning Curve Estimates

Our analysis considers the three electrolyzer technologies alkaline, PEM, and SOC. For each of these technologies, modules combine electrolysis stacks with so-called balance-of-system components²⁶. A stack broadly consists of multiple cells where electricity splits water molecules into hydrogen and oxygen. Power electronics, heat and fluid management, and hydrogen treatment comprise the balance of system²⁷. Our analysis excludes the pressurization of hydrogen via compressors.

In addition to the acquisition price, the system price for a PtG system reflects project development and installation costs. Since PtG systems have been procured through customized manufacturing contracts in the past, some reductions in system prices have emerged from early efforts to standardize and automate production processes along with increased manufacturing capacity^{23;28;29}. Technological improvements have further allowed manufacturers to build larger systems, cut production waste, and save on material costs. Examples of such innovations include better electrode design and bipolar plates, as well as replacing expensive, custom-made components with commercially available ones^{27;28;30;31}.

The conversion efficiency of a PtG system is measured in the total energy in kWh required to produce one kg of hydrogen. This includes the energy required for heat management and the electrolytic production process. Initial improvements in energy consumption have resulted from larger stacks with a better distribution of current density across the reactive surface area, lower system complexity, and improved system integration^{15;27}. For PEM electrolyzers, new materials have enabled thinner membranes and more active catalysts at

the cell level³⁰.

For the years 2000–2020, our global data collection effort tracks system prices, the energy consumption of the PtG systems, and capacity installations at the corresponding facilities. As detailed in *Methods*, the information collected in our database stems from multiple sources, including manufacturers, industry databases, academic articles in peer-reviewed journals, and technical reports by agencies, consultancies, and industry analysts. Overall, the resulting data provide a sizeable sample for alkaline and PEM systems beginning in the early 2000s. For the more recent technology of SOC electrolyzers, our data begin in 2011. The resulting total cumulative installed capacity across the three PtG technologies amounts to about 200 Megawatt (MW) in 2020, a figure that is consistent with recent industry estimates^{27;32}.

For each PtG technology, the learning effects are assumed to conform to a constant elasticity learning model. Accordingly, both system prices and energy consumption are a function of the cumulative installed capacity of the particular technology³³. Let v_i denote the system prices per Watt (W) of peak power absorption of a technology in year i and Q_i the cumulative installed capacity of a technology in kilowatt (kW) in year i . In logarithmic form:

$$\ln(v_i) = \beta_0 + \beta_1 \cdot \ln(Q_i) + \mu_i, \quad (1)$$

where β_1 denotes the learning elasticity parameter and μ_i is an idiosyncratic and unbiased error term. Equation 1 predicts that with every doubling of installed cumulative electrolyzer capacity, the system price of a PtG technology declines to 2^{β_1} of its previous value. A parallel equation is used to estimate the learning factor associated with a technology’s conversion efficiency.

Alkaline electrolyzers currently exhibit the highest cumulative installed capacity and the lowest average system prices at \$0.9/W (Figure 1a–c, details in Supplementary Note 1). The reduction in system prices across the years 2003–2020 corresponds to a learning factor of $2^{\beta_1} = 84.3\%$ with a 95%-confidence interval of 2.7% ($p < 0.0001$, adj. $R^2 = 0.51$). This implies that system prices declined by 15.7% with every doubling of cumulative installed capacity. As of today, SOC electrolyzers, in contrast, have the lowest cumulative installed capacity and the highest system prices at \$2.3/W in 2020. Yet, they also exhibit the fastest price decline, described by a learning factor of $83.3 \pm 6.5\%$ across the years 2011–2020 ($p < 0.0001$, adj. $R^2 = 0.24$). PEM electrolyzers experienced a sharp decline in system

prices from \$8.3/W in 2003 to \$1.1/W in 2020 but also rapid growth in cumulative installed capacity from less than 0.1 to almost 100 MW. The resulting learning factor amounts to $86.2 \pm 1.7\%$ ($p < 0.0001$, adj. $R^2 = 0.74$).

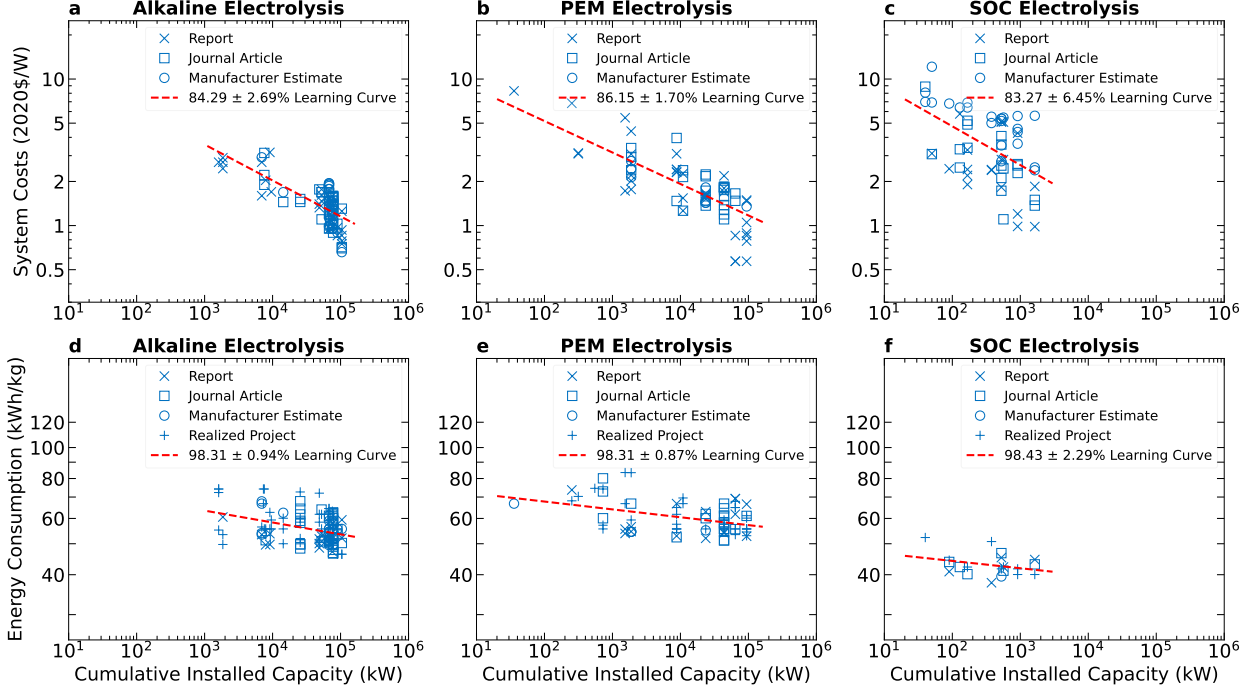


Figure 1. Estimates of learning curves. a, b, c, d, e, f This figure plots the global system prices in 2020 \$US against the global cumulative installed capacity together with our estimates of the corresponding learning curves for (a) alkaline, (b) PEM, and (c) SOC electrolyzers. The figure also plots the energy consumption against the global cumulative installed capacity together with our estimates of the corresponding learning curves for (d) alkaline, (e) PEM, and (f) SOC electrolyzers.

In terms of energy consumption, alkaline systems have exhibited improvements from above 60 kWh/kg in the early 2000s to 52 kWh/kg in 2020 (Figure 1d-f). Similarly, PEM electrolyzers have witnessed a decline from above 70 kWh/kg in the early 2000s to 57 kWh/kg in 2020, while the SOC technology improved from above 50 kWh/kg in 2011 to around 42 kWh/kg in 2020. Despite the differences in absolute values, our regression analysis yields very similar learning factors for the three PtG technologies. Specifically, the estimated learning factors are $98.3 \pm 0.9\%$ ($p < 0.001$, adj. $R^2 = 0.08$) for alkaline, $98.3 \pm 0.9\%$ ($p < 0.001$, adj. $R^2 = 0.15$) for PEM electrolyzers, and $98.4 \pm 2.3\%$ ($p < 0.2$, adj. $R^2 = 0.08$) for the SOC technology.

To examine the robustness of our learning curve estimates, we first implement different

specifications for estimating the potential effect of changes in the size of PtG systems on the development of system prices. As detailed in *Methods*, our regression results indicate significant and robust learning coefficients for cumulative installed capacity and a limited effect of capacity sizes. In addition, we estimate the potential effect of changes in the market prices for platinum and iridium, which are currently included in components of PEM electrolyzers. This analysis shows that the learning factor of cumulative installed capacity remains unchanged, while the estimated coefficients for both metals are economically and statistically insignificant.

Earlier studies on the decline in the system prices of alkaline electrolyzers have estimated learning parameters between 82–84% with a 95%-confidence interval of $\pm 6\text{--}13\%$ ^{15–17}. While these values are similar in magnitude to our estimate for alkaline electrolyzers (Figure 1a), the larger number of observations in our analysis yields a much tighter 95%-confidence interval at $\pm 2.7\%$. Aside from sample size, the lower variance in our sample is also likely to reflect standardization in the product offering of electrolysis equipment manufacturers, particularly for alkaline and PEM systems.

A common alternative to learning curves based on cumulative installed capacity is the estimation of technological progress as a function of time. As detailed in *Methods*, we find significant and robust annual improvements in system prices and energy consumption for all three PtG technologies. The annual decline rates for system prices lie substantially below those identified in previous studies^{20–22}, which reflects the rapid development captured by the global information in our database. We are not aware of previous studies examining changes in the conversion efficiency of PtG systems.

3 Extrapolating Future Performance

Based on the learning estimates in Figure 1, we now project trajectories of future system prices and energy consumption for each PtG technology. Our projections consider three alternative scenarios to compare different growth scenarios for electrolyzer installations over the coming years.

The first scenario (called “Past Growth”) examines the possibility that the cumulative installed capacity for each technology continues to grow at the same rate as observed on average in the past. To estimate this rate, we ran for each technology a univariate regression based on the constant elasticity functional form: $\ln(Q_i) = \lambda_0 + \lambda_1 \cdot i + \epsilon_i$. The regressions

yield an estimate for the annual growth of $e^{\lambda_1} - 1 = 42.8\%$ for alkaline electrolysis covering the years 2000–2020 ($p < 0.001$, adj. $R^2 = 0.83$), 76.0% for PEM systems between 2003–2020 ($p < 0.001$, adj. $R^2 = 0.98$), and 51.0% for SOC technology over 2011–2020 ($p < 0.001$, adj. $R^2 = 0.99$). The resulting estimates of cumulative installed capacity for each technology in 2030 are shown in Table 1 (details in Supplementary Note 2).

Table 1. Estimates of cumulative installed capacity by 2030.

in MW	Alkaline	PEM	SOC	Total
Past Growth	3,670	26,898	100	30,688
Policy Target	13,772	100,861	376	115,009
Industry Target	29,682	217,458	812	247,952

The second scenario (called “Policy Target”) assumes that the cumulative installed capacity of the PtG technologies will grow such that their total in 2030 reaches the sum of individual policy targets for installed capacity. As detailed in Supplementary Note 2, these targets stem from national hydrogen strategies articulated in recent years and, as of now, amount to about 115 Gigawatt (GW) in total. Since these targets are technology-agnostic and specified for installed capacity, we assume that each technology’s share of the total cumulative installed capacity by 2030 is the same as in the Past-Growth scenario. Further, we interpolate the growth in cumulative installed capacity for each technology during the years 2020–2030. Alternative distributions for the technology-specific shares in 2030 have only a small effect on our subsequent findings, especially for alkaline and PEM electrolysis (see Supplementary Note 2 for details). In addition, we account for capacity depletion by adding in each year from 2021 onward the installed capacity expected to have gone offline until that year based on the installation year and a useful lifetime of 20 years^{22;34}. Table 1 provides the resulting estimates, with implied annual growth rates for cumulative installed capacity of 63.4% for alkaline, 101.5% for PEM, and 72.8% for SOC electrolysis.

In direct analogy to the second scenario, our third scenario (called “Industry Target”) assumes that the cumulative installed PtG capacity grows such that the sum across individual industry targets for installed capacity in 2030 is reached. These targets result from numerous announcements by project developers, hydrogen customers, and industry associations made in recent years and amount in total to about 248 GW. Table 1 shows the resulting estimates for cumulative installed capacity by 2030 for each technology. The implied (interpolated) annual growth rates for cumulative installed capacity amount to 75.9% for alkaline, 117.0%

for PEM, and 86.0% for SOC systems.

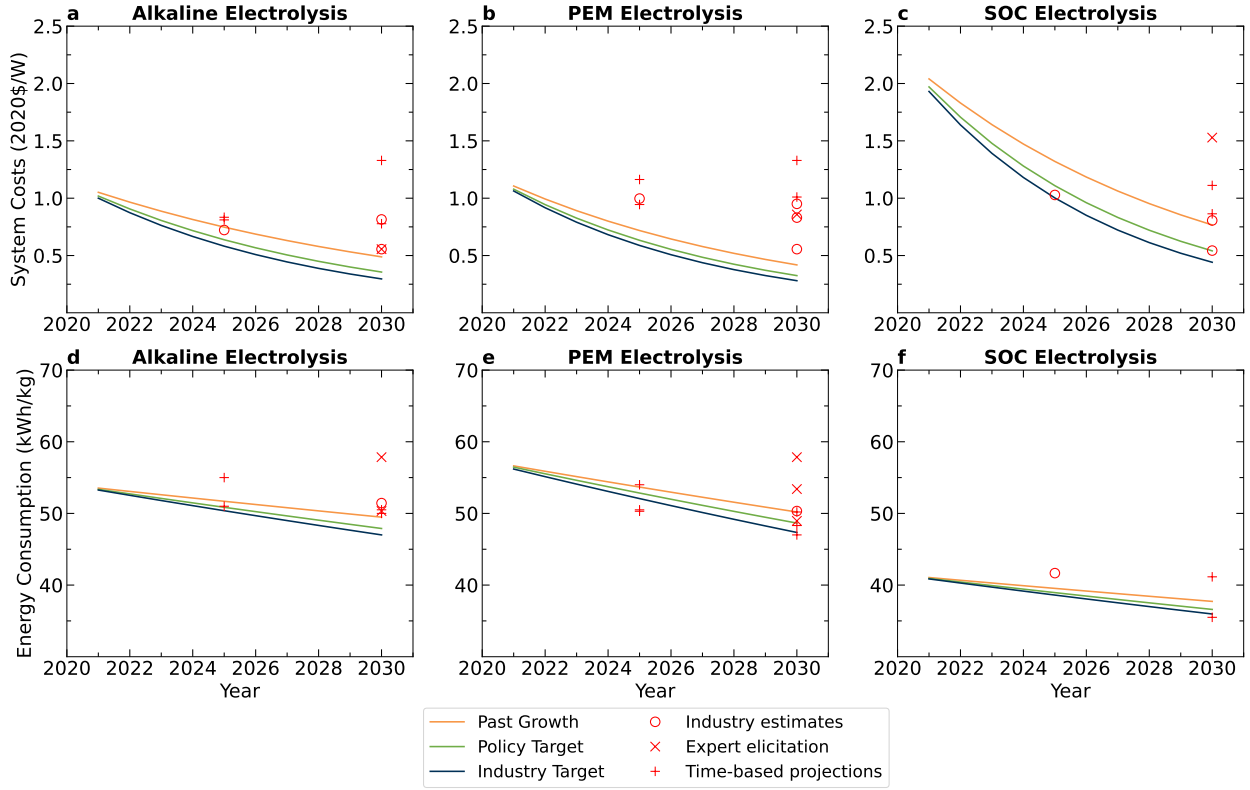


Figure 2. Prospects for system prices and conversion efficiency. **a, b, c, d, e, f** This figure shows our projections of the potential development of system prices in 2020 \$US for (a) alkaline, (b) PEM, and (c) SOC electrolyzers. It also shows our projections of the potential trajectory of energy consumption for (d) alkaline, (e) PEM, and (f) SOC electrolyzers.

The resulting trajectories shown in Figure 2 suggest that the system prices of all three technologies are likely to fall substantially over the coming years. Specifically, our calculations project ranges for system prices by 2030 across the scenarios of \$285–475/kW for alkaline, \$225–352/kW for PEM, and \$441–767/kW for SOC electrolysis. We also find that, despite the sizable variation in the growth of cumulative installed capacity across the scenarios, the trajectories of system prices for alkaline and PEM electrolysis stay relatively close to each other. For these two technologies, differences in the number of doublings in cumulative installed capacity across the scenarios are smaller than for SOC electrolysis.

Regarding the energy consumption of PtG systems, our projections for 2030 yield ranges across the scenarios of 47–49 kWh/kg for alkaline, 47–50 kWh/kg for PEM, and 36–38 kWh/kg for SOC technology. Thus, the energy consumption of alkaline and PEM systems

is moving towards the target of 42 kWh/kg by 2050 set by the International Renewable Energy Association²⁷. The projected reduction for alkaline systems is also consistent with recent advances in capillary-fed electrolysis cells that exhibit a 15% lower power consumption relative to commercially available systems³⁵. SOC electrolyzers are likely to approach the theoretical optimum of 33 kWh/kg towards the end of this decade. Analogous to system prices, the trajectories for alkaline and PEM electrolysis stay relatively close to each other.

As a robustness check, we also extrapolate the future performance of PtG technologies based on time. As one would expect, the resulting system prices and energy consumption values are close, if not identical, to the trajectories for the Past-Growth scenario reported in Figure 2. Furthermore, we examine a specification based on time and cumulative installed capacity. As detailed in *Methods*, there is high multicollinearity between the two covariates. Nevertheless, the projected trajectories for system prices and energy consumption are again close to the Past-Growth scenario.

Figure 2 also shows point estimates for future system prices and energy consumption as articulated by industry experts^{36–38}, technical reports^{39–44} and academic studies^{22;23;34;45}. In comparison, our projections for both system prices and energy consumption yield estimates that are consistently and substantially below most of the earlier estimates. We attribute this discrepancy to multiple factors. First, our projections model technological progress not as an exogenous function of time but as an endogenous process driven by deployment rates. In addition, the Policy and Industry Targets suggest a substantial acceleration in the deployment of PtG systems, the magnitude of which is consistent with the projected demand for clean hydrogen by 2030⁴⁶ and the ramp-up of manufacturing capacity for PtG systems^{47–49}. Finally, our calculations are based on recent global information reflecting the rapidly improving system prices and efficiencies as well as the observed recent growth in capacity deployments.

4 Levelized Cost of Hydrogen Production

Recognizing the potential of hydrogen as a decarbonized energy source, the U.S. Department of Energy articulated the *Hydrogen Shot* initiative in 2021. According to this initiative, the cost of producing hydrogen is to come down to \$1.0/kg by the year 2030⁷. The system prices and conversion efficiencies we forecast in Figure 2 are useful in gauging whether the U.S. Department of Energy’s goal appears to be a “long shot.” To that end, we calculate

a life-cycle cost measure termed the Levelized Cost of Hydrogen (LCOH). Analogous to the levelized cost of electricity, the LCOH yields a break-even value for investing in a particular electrolyzer technology. If an investor were to receive the LCOH as the revenue per kg of hydrogen, the investor would exactly break even in terms of future discounted cash flows, including the initial capacity investment and all subsequent operating expenses (see *Methods* for details).

Earlier studies have established that, in addition to system prices and conversion efficiency, electricity consumption is a major cost component of electrolytic hydrogen^{34;50}. Our initial cost calculations are based on a scenario where the electrolyzer operates as a stand-alone PtG system. The operator can purchase power in the wholesale Texas electricity market, subject to a markup for industrial customers. In optimizing the use of its PtG system, the operator has the option of idling the electrolyzer during those hours when the prevailing market price of electricity is high and, therefore, hydrogen conversion would have a negative contribution margin. Accordingly, we consider a price vector of 8,760 hours, where each entry is calculated as the average across the day-ahead prices observed in the Texas market between the years 2016–2020. Fixed operating costs are estimated as a percentage of system prices and account for the replacement of electrolysis stacks during the life of the system. The useful lifetime of a system is set to 20 years and the cost of capital to 5.0% for all technologies (details in *Methods* and Supplementary Note 7).

Depending on the growth scenario, our calculations yield LCOH estimates in the range of \$1.4–1.7/kg for alkaline, \$1.4–1.6/kg for PEM, and \$1.2–1.5/kg for SOC electrolyzers (Table 2, details in Supplementary Note 7). The resulting LCOH ranges may appear surprisingly small, given the large variation in the assumed growth rates under the different scenarios. The main reason for the relatively limited LCOH range is that, depending on the electrolyzer technology, the variable cost of electricity accounts for about 70–90% of the total LCOH by the year 2030. Thus, system prices, fixed operating costs, the assumed useful life of the electrolyzer, and the cost of capital have only a minor impact on the overall LCOH. In particular, SOC electrolysis is projected to entail the lowest LCOH among the three technologies. The cost disadvantage of higher system prices in comparison to alkaline and PEM systems is more than compensated by the lower energy consumption of SOC electrolyzers.

With many jurisdictions, including Texas, increasingly deploying intermittent renewable power sources, recent studies have identified an emerging trend towards electricity price

Table 2. Estimates of levelized cost of hydrogen by 2030.

in 2020 \$US	Alkaline	PEM	SOC
General parameters			
Economic lifetime (years)	20	20	20
Cost of capital (%)	5.00	5.00	5.00
Average electricity buying price (¢/kWh)	3.59	3.59	3.59
Past Growth			
System price (\$/kW)	475	352	767
Fixed operating cost (\$/kW)	12	11	23
Energy consumption (kWh/kg)	49.48	49.84	37.72
Average optimized capacity factor (%)	82.52	71.88	86.59
Levelized cost of hydrogen (\$/kg)	1.71	1.61	1.53
Policy Target			
System price (\$/kW)	340	263	536
Fixed operating cost (\$/kW)	9	8	16
Energy consumption (kWh/kg)	47.86	48.21	36.58
Average optimized capacity factor (%)	74.27	61.35	79.08
Levelized cost of hydrogen (\$/kg)	1.53	1.46	1.33
Industry Target			
System price (\$/kW)	284	225	441
Fixed operating cost (\$/kW)	7	7	13
Energy consumption (kWh/kg)	47.00	47.34	35.96
Average optimized capacity factor (%)	69.03	55.16	73.58
Levelized cost of hydrogen (\$/kg)	1.44	1.39	1.24

distributions characterized by lower average values and higher price volatility^{51–54}. Higher seasonal and intra-day price volatility is advantageous from an LCOH perspective because electrolyzers can play an effective arbitrage role by consuming electricity only during hours with relatively low prices. As a robustness check to our calculations in Table 2, we calculate LCOH values in a scenario where average power prices (in \$2020) declined by 15% in 2030. At the same time, hourly prices above the annual average are assumed to increase by 15%, while those below the annual average decrease by a corresponding amount such that the annual average remains unchanged. The resulting LCOH values in Table 2 would then decline substantially, falling in the range of \$1.2–1.4/kg for alkaline, \$1.1–1.3/kg for PEM, and \$1.0–1.3/kg for SOC electrolyzers (details in *Methods*).

5 Policy Implications

Our findings on the economics of electrolytic hydrogen speak directly to several recent policy initiatives. We first note that even our most ambitious growth scenario for electrolyzer deployment, that is, the Industry Target falls significantly short of the target for 2030 by the International Energy Agency (IEA). As part of its “Net-zero by 2050” scenario, the IEA postulates 850 GW of installed capacity by 2030 and 3,000 GW by 2045⁵⁵.

In addition, we note that most data points underlying our Policy and Industry Targets were formulated prior to the recent hydrogen ambition by the European Union⁶ and the Inflation Reduction Act in the United States⁵⁶. The production tax credit of up to \$3.0/kg of clean hydrogen available under the Inflation Reduction Act is likely to advance the deployment growth of PtG systems significantly in the United States. This growth will be reinforced by the goal of the European Union that seeks to induce its member states to collectively produce 20 million tons of green hydrogen annually by the year 2030⁶.

Our findings on the levelized cost of hydrogen indicate that the *Hydrogen Shot* cost target of \$1.0/kg by 2030 does not appear unrealistic, even if electrolyzer deployments grow only at the rates underlying our calculations. Put differently, suppose that hydrogen trades at \$1.0/kg in 2030. A relatively modest subsidy, such as a production tax credit of less than \$0.70 per kg, should then be sufficient for investments in new PtG systems to be profitable. These projections, however, assume the availability of inexpensive electricity, even if it is only available intermittently. It will therefore be essential for policy makers to take advantage of the inherent synergies between renewable power generation and electrolytic hydrogen.

6 Conclusion

Broad adoption of electrolytic hydrogen production will depend on improvements in system prices and conversion efficiency of Power-to-Gas technologies. This paper provides a comprehensive assessment of the dynamics in both parameters for alkaline, polymer electrolyte membrane, and solid oxide cell electrolyzer systems. Our calculations yield significant and robust learning curves of 83–86% for system prices and 98% for energy consumption over the past two decades. Based on these estimates, we project that all three technologies will become substantially cheaper and more energy-efficient. In particular, our calculations suggest that the *Hydrogen Shot* target by the U.S. Department of Energy of producing clean

hydrogen at a cost of \$1.0/kg by 2030, while ambitious, is not unrealistic.

Future studies on electrolytic hydrogen production would benefit from more detailed information on the manufacturing cost and market prices of individual system parts (i.e., electrolysis stacks and balance-of-system components) as well as the research and development expenditures and the annual production capacity of equipment manufacturers. Such information could shed further light on the factors that drive cost reductions. It will also be instructive to broaden the line of inquiry in this paper to other technologies for clean hydrogen production, such as alkaline exchange membrane electrolysis, steam methane reforming with carbon capture and storage, or natural gas pyrolysis.

Methods

Review of System Prices. Information on system prices is based on two earlier reviews^{22;34} and a replication of the analyses performed therein. Specifically, we gathered price estimates from various sources, including manufacturers, academic articles in peer-reviewed journals, and technical reports by agencies, consultancies, and industry analysts. Academic articles were found by searching databases like Web of Science, Scopus, Google Scholar, and Sciencedirect. Keywords used in the search include ‘electrolyzer system prices’, ‘power-to-gas system prices’, and ‘electrolyzers for hydrogen production + system prices’. Industry publications and technical reports were retrieved with a Google search based on the same keywords, where we reviewed the top 100 search results.

Our review procedures retrieved 396 unique sources, which we filtered by multiple criteria to maintain quality and timeliness. We first excluded sources without clear information on system prices (60). We also excluded sources referencing other articles as original sources (66) but then traced the references back to the original sources and added those sources to the pool if they included original data. We further excluded sources without explicit references or methods for obtaining the cost estimate (94). In addition, we excluded five articles that were published before the year 2000 to focus on recent developments. Finally, we excluded estimates for alkaline systems manufactured in China²⁸, primarily because of differences in technology and manufacturing standards⁵⁷.

Our procedure yielded 176, primarily European and North-American, sources containing 264 unique observations from industry or an original review of multiple sources. Of these observations, 105 belong to alkaline electrolysis over the years 2003–2020, 81 to PEM system

between 2003–2020, and 78 to SOC technology spanning the years 2011 to 2020. Since SOC electrolyzers are reversible, we include estimates for fuel cells in our sample.

For all sources, we converted any range estimates to the midpoint in the reported range. Estimates given in currencies other than \$US were converted based on the annual average exchange rate of the respective year. We further adjusted historical price information for inflation using the yearly inflation adjustment factor for qualified energy resources as provided by the US Internal Revenue Service.

Finally, all observations of one technology were winsorized at the 5.0% level in combination with a moving time window of 3 years ranging from 1 year before to 1 year after the year in which price estimates are adjusted. Winsorization has only a minor effect on our findings for all technologies.

Review of Cumulative Installed Capacity. Our data set of cumulative installed capacity is primarily based on the *Hydrogen Projects Database* by the International Energy Agency⁵⁸. The original database includes production facilities that have been commissioned worldwide since 2000 for the generation of clean hydrogen and hydrogen derivatives. Production technologies listed in the database comprise alkaline, PEM, and SOC electrolysis, coal gasification and natural gas steam reforming both with carbon capture and storage technology, and other production pathways such as biogas pyrolysis, biogas steam reforming, or biogas membrane separation. In addition, the database also includes facilities where the type of electrolysis is undisclosed.

The original database lists 445 separate hydrogen production facilities. Since many of these entries miss information on the commissioning date and the installed capacity size, we manually reviewed each entry. We thereby relied on the source provided in the database and on publicly available information from news coverage, industry reports, project websites, and press releases of investors, project developers, and manufacturers. In the course of our review, we could verify information for 186 projects from the original database and could amend or adjust entries for 111 projects. We could not verify or complete information for 111 projects due to a lack of publicly accessible information. Furthermore, we excluded 37 projects based on production technologies other than water electrolysis.

In addition, we conducted our own review of hydrogen projects based on industry announcements and media coverage. This review identified 133 additional projects that we added to the data set. Our final data set comprises 430 complete entries, of which 225 repre-

sent PtG facilities based on either alkaline, PEM, or SOC technology that were built worldwide between the years 2000–2020. Of these projects, 99 are alkaline electrolysis systems, 112 projects comprise PEM electrolyzers, and 14 facilities are based on SOC technology. If projects had a construction period of more than one year, we use the starting year, that is, the commission date in our calculations. The resulting total cumulative installed capacity across the three PtG technologies amounts to about 200 Megawatt (MW) in 2020, which is consistent with recent estimates by industry analysts^{27;32}.

The IEA recently published an update of the *Hydrogen Projects Database*⁵⁹. This update includes some changes to the list of capacity installations in the previous version from which our review departed. However, the total cumulative installed capacity across the three PtG technologies in 2020 resulting from the update is slightly less than the 200 MW resulting from our database. We attribute this difference to the additional review of capacity installations we conducted.

Review of Conversion Efficiency. Information on specific energy consumption stems from the preceding two reviews. In total, we retrieved 229 data points: 130 for alkaline systems over the years 2000–2020, 78 for PEM systems between 2005–2020, and 21 for SOC systems across 2011–2020. We interpret these values as those obtained at full capacity utilization. Alkaline and PEM electrolyzers attain a near-constant energy consumption beyond a small threshold utilization level²⁶. For SOC systems, existing literature provides little evidence for the change in energy consumption as a function of capacity utilization. For all technologies, the energy consumption values incorporate conversion losses incurred for the heat management of a PtG system.

Analog to system prices, we converged range estimates (if given) to the arithmetic mean of the lowest and highest points in the range. Furthermore, estimates given in units other than kWh/kg were converted based on the lower heating value of hydrogen (120 MJ/kg) and a density of hydrogen of 0.090 kg/Nm³. All observations of a technology were winsorized at the 5.0% level in combination with a moving time window of 3 years ranging from 1 year before to 1 year after the year in which the estimates are adjusted. Analog to system prices, this winsorization has a small effect on our findings for all technologies.

Discussion of Learning Estimates and Projections. Our analysis has relied on the common concept of univariate constant elasticity learning curves based on cumulative installed capacity. Yet, earlier work suggests that the system prices of a PtG facility decline at

a diminishing rate as the capacity size of the system increases^{20;21;26}. Information on system sizes available to us is largely disconnected from the data on system prices. Nevertheless, we examine multiple different specifications for estimating the potential effect of changes in the size of PtG systems on the trajectory of system prices (details in Supplementary Note 3). The results point towards significant and robust learning coefficients for cumulative installed capacity and a limited effect of capacity sizes. This is consistent with studies examining the cost dynamics of onshore wind turbines^{10–12}, solar photovoltaic modules^{8;9}, or lithium-ion batteries^{13–15}. It is also consistent with the observation that scale economies of PtG plants appear to level off as system sizes exceed a particular threshold^{20;21;42}.

Some components of PEM electrolyzers, such as the catalysts, porous transportation layers, and bipolar plates, currently comprise rare earths, primarily platinum and iridium. To estimate the potential effect of changes in the market prices for both metals, we calibrate an extension of equation (1) for PEM systems that includes the annual average global market price for each metal as additional regression coefficient. As detailed in Supplementary Note 4, the regression result shows that the learning elasticity of cumulative installed capacity remains unaffected, while the estimated coefficients for both metals are economically and statistically insignificant.

An alternative approach to learning curves based on cumulative installed capacity is to estimate technological progress as a function of time. As detailed in Supplementary Note 5, our regressions return annual declines in system prices of $6.0 \pm 1.0\%$ for alkaline over the years 2003–2020 ($p < 0.0001$, adj. $R^2 = 0.56$), $12.6 \pm 1.4\%$ for PEM between 2003–2020 ($p < 0.0001$, adj. $R^2 = 0.77$), and $10.6 \pm 4.2\%$ for SOC electrolyzers covering 2011–2020 ($p < 0.0001$, adj. $R^2 = 0.25$). Furthermore, we identify annual reductions in energy consumption of $0.8 \pm 0.4\%$ for alkaline across the years 2000–2020 ($p < 0.0001$, adj. $R^2 = 0.11$), $1.4 \pm 0.7\%$ for PEM electrolyzers across 2005–2020 ($p < 0.0001$, adj. $R^2 = 0.15$), and $1.0 \pm 1.4\%$ for the SOC technology between 2011–2020 ($p < 0.15$, adj. $R^2 = 0.07$).

Earlier studies^{22;34} have estimated the annual decline in system prices at 3.0% for alkaline and 4.8% for PEM electrolysis covering the years 2003–2016, and at 9.0% for SOC electrolysis based on data for the years 2011–2019. We attribute the faster price declines identified in our analysis to the additional price observations reflecting the recent dynamics in productive and innovative activity by electrolyzer manufacturers. At the same time, we note that the estimate for PEM electrolyzers might be somewhat over-optimistic due to many observations

of lower system prices in recent years.

We then use our estimates of the annual decline rates to project potential future system prices and energy consumption. The resulting trajectories for system prices and energy consumption are close, if not identical, to the trajectories for the Past-Growth scenario reported in Figure 2. As an exception to this, the time-based projection for system prices of PEM electrolyzers is closer to the trajectory of the Industry-Target scenarios. We attribute this discrepancy to the large share of lower price observations in recent years.

We also analyze a specification based on both time and cumulative installed capacity. As detailed in Supplementary Note 5, this specification exhibits considerable multicollinearity between the two covariates, which leaves the resulting regression estimates unreliable. Despite this, the projected trajectories for system prices and energy consumption are again close to the Past-Growth scenario in Figure 2. In summary, we conclude that all scenarios and specifications in our calculations deliver a consistent assessment regarding the magnitudes of and trends in cost and efficiency improvements.

Levelized Cost of Hydrogen. In direct analogy to the commonly referenced levelized cost of electricity⁶⁰, the LCOH identifies the constant price per kg of hydrogen that an investor would have to earn over the useful life of the PtG system in order to break even in terms of discounted after-tax cash flows. As such, the LCOH enables a cost comparison of alternative PtG technologies that differ in their cost structure and operational characteristics. The following derivation demonstrates that, for a given hydrogen price p , investment in a PtG system is profitable if and only if: $p \geq LCOH$.

The price per kWh at time t at which a PtG operator can purchase electricity from the market is denoted by $q(t)$. Here t is an integer where $1 \leq t \leq 8,760$. Since all three of PtG technologies considered here can both be ramped up quickly to operating temperature and conversely can be ramped down rapidly³⁴, the capacity utilization factor, denoted by $CF(t)$ can be chosen flexibly on the interval $[0, 1]$ for each hour of the year. Representing the conversion efficiency of a PtG system (in kg/kWh) by the parameter η , where $0 < \eta < 1$, the variable cost for producing 1 kg of hydrogen at time t is given by:

$$w(t) = \frac{q(t)}{\eta} + w_h.$$

Here w_h reflects a cost increment incurred per kg of hydrogen produced for consumable inputs, such as water and reactants for deionizing the water. The optimized capacity factor,

$CF^*(t)$, at time t will then be chosen to maximize $\eta \cdot [p - w(t)] \cdot CF(t)$. Thus, $CF^*(t) = 1$ if $p - w(t) > 0$, while $CF^*(t) = 0$ if $p - w(t) < 0$. This yields the optimized annual contribution margin:

$$CM^* \equiv \sum_{t=1}^{8,760} \eta \cdot [p - w(t)] \cdot CF^*(t).$$

For the purpose of the economic model, we can normalize the capacity investment in the PtG system to 1 kW of peak electricity absorption without loss of generality. To be sure, our numerical analysis calibrates the costs and revenues of a PtG facility in accordance with the system sizes that have been built in recent years. We denote the fixed operating costs per kW of installed capacity by F_i in year i . In case the productive capacity of a PtG system degrades over time, we denote by x_i the share of the initial capacity that is still productive in year i . Given a price for hydrogen p , the overall pre-tax cash flows per kW of peak power absorption capacity of the PtG system in year i is then given by:

$$CFL_i^o = x_i \cdot CM^* - F_i.$$

Let the system prices per kW of peak capacity be given by v . By definition, investment in the PtG system yields a non-negative net present value in terms of after-tax cash flows per kW of peak capacity over the useful life of T years if and only if:

$$\sum_{i=1}^T CFL_i \cdot \gamma^i - v \geq 0, \quad (2)$$

where $\gamma = (1 + r)^{-1}$ represents the discount factor when r is the applicable cost of capital, and CFL_i is the after-tax cash flow in year i . To account for the impact of corporate income taxes, we denote the firm's income tax rate by α with $0 < \alpha < 1$. Provided $d_i \geq 0$ is the percentage of the applicable tax depreciation charge in year i (where $\sum d_i = 1$), the firm's taxable income associated with the investment is $I_i = CFL_i^o - v \cdot d_i$. Thus, the after-tax cash flow in year i is:

$$CFL_i = CFL_i^o - \alpha \cdot I_i.$$

Direct substitution shows that the inequality in (2) holds if and only if:

$$(1 - \alpha) \sum_{i=1}^T [x_i \cdot CM^* - F_i] \gamma^i \geq v \cdot \left[1 - \alpha \cdot \sum_{i=0}^T d_i \cdot \gamma^i \right]. \quad (3)$$

Dividing by $(1 - \alpha)$ the inequality in (3) reduces to:

$$\sum_{i=1}^T \left[x_i \cdot CM^* - F_i \right] \gamma^i \geq v \cdot \Delta, \quad (4)$$

where the tax factor Δ , with $0 \leq \Delta \leq 1$ is defined by:

$$\Delta \equiv \frac{1 - \alpha \cdot \sum_{i=0}^T d_i \cdot \gamma^i}{1 - \alpha}. \quad (5)$$

It will be convenient to identify the life-cycle levelization factor as the anticipated number of kilograms of hydrogen that the PtG system will generate per kW of peak capacity over its useful life, given optimized capacity utilization:

$$L \equiv \sum_{i=1}^T x_i \cdot \gamma^i \cdot \left[\sum_{t=1}^{8,760} \eta \cdot CF^*(t) \right].$$

Since the investment expenditure for capacity is shared by the entire quantity of hydrogen produced over the life-cycle of the facility, the levelized cost of capacity becomes:

$$c \equiv L^{-1} \cdot v.$$

Similarly, the levelized fixed operating cost per kg of hydrogen becomes:

$$f \equiv L^{-1} \cdot \sum_{i=1}^T F_i \cdot \gamma^i.$$

Finally, given optimized capacity utilization, the levelized variable cost per kg of hydrogen is given by:

$$w^* \equiv L^{-1} \cdot \left[\sum_{i=1}^T x_i \cdot \gamma^i \cdot \left[\sum_{t=1}^{8,760} \eta \cdot w(t) \cdot CF^*(t) \right] \right].$$

The final step in the derivation is to verify that, for any given hydrogen price, inequality (4) is met if and only if:

$$p \geq LCOH \equiv w^* + f + c \cdot \Delta.$$

Estimates of Levelized Cost of Hydrogen. Our calculations are based on the system prices and energy consumption values reported in Figure 2 for the year 2030. Fixed operating

costs are estimated as a percentage of system prices and account for the replacement of electrolysis stacks during the life of the system. Variable operating costs are mainly driven by electricity prices. Since our estimation requires hourly electricity prices, we initially assume a price vector where each hourly price is equal to the average across the day-ahead prices observed in Texas between the years 2016–2020 for the corresponding hour:

$$q(t) = \frac{1}{5} \sum_{i=2016}^{2020} q_i(t),$$

with i reflects the years from 2016–2020. The resulting price vector reflects a deregulated electricity market with a substantial share of renewable power generation, though it is admittedly ad-hoc. All input parameters used in our calculations and all results are provided in Supplementary Note 7.

Our analysis shows that the resulting LCOH values are mainly determined by electricity prices. To examine the sensitivity of the LCOH values on electricity prices, we calculate a variation in which the average of electricity prices is lower while the variance around the annual average is higher. In particular, let $\mu(t)$ denote the multiplicative deviation factor given by:

$$q(t) \equiv \mu(t) \cdot \frac{1}{m} \sum_{t=1}^m q(t).$$

By construction,

$$\sum_{t=1}^m \mu(t) = 1.$$

Furthermore, let α denote the relative change in the annual average of electricity prices and β the relative change in the hourly variation of electricity prices during hours where prices are above average. In addition, we calculate the corresponding change in the hourly variation of electricity prices during hours where prices are below average, denoted by $\hat{\beta}$, such that the adjusted annual average remains unchanged. Thus, the adjusted electricity price in a particular hour is given by:

$$\hat{q}(t) = \begin{cases} \beta \cdot \mu(t) \cdot \alpha \cdot \frac{1}{m} \sum_{t=1}^m q(t) & \text{for } t, \text{ where } \mu(t) \geq 1, \\ \hat{\beta} \cdot \mu(t) \cdot \alpha \cdot \frac{1}{m} \sum_{t=1}^m q(t) & \text{for } t, \text{ where } \mu(t) < 1, \end{cases}$$

where $\hat{\beta}$ is calculated such that

$$\frac{1}{m} \sum_{t=1}^m \hat{q}(t) = \alpha \cdot \frac{1}{m} \sum_{t=1}^m q(t).$$

Data availability

The data used in this study are referenced in the main body of the paper and the Supplementary Information. Data that generated the plots in the paper are provided in an Excel file available as part of the Supplemental Data. Additional information is available upon request to the corresponding author.

Code availability

Computational code is available upon request to from the corresponding author.

References

- [1] Staffell, I. *et al.* The role of hydrogen and fuel cells in the global energy system. *Energy and Environmental Science* **12**, 463–491 (2019).
- [2] Davis, S. J. *et al.* Net-zero emissions energy systems. *Science* **9793** (2018).
- [3] Sepulveda, N. A., Jenkins, J. D., Edington, A., Mallapragada, D. S. & Lester, R. K. The design space for long-duration energy storage in decarbonized power systems. *Nature Energy* (2021).
- [4] Guerra, O. J. *et al.* The value of seasonal energy storage technologies for the integration of wind and solar power. *Energy & Environmental Science* (2020).
- [5] Ueckerdt, F. *et al.* Potential and risks of hydrogen-based e-fuels in climate change mitigation. *Nature Climate Change* (2021).
- [6] Repowereu: A plan to rapidly reduce dependence on russian fossil fuels and fast forward the green transition (2022). URL <https://bit.ly/3SmPzoN>.
- [7] U.S. Department of Energy. Secretary granholm launches hydrogen energy earthshot to accelerate breakthroughs toward a net-zero economy (2021). URL <https://bit.ly/2XtmAbK>.

- [8] Reichelstein, S. & Sahoo, A. Relating product prices to long-run marginal cost: Evidence from solar photovoltaic modules. *Contemporary Accounting Research* (2017).
- [9] Rubin, E. S., Azevedo, I. M., Jaramillo, P. & Yeh, S. A review of learning rates for electricity supply technologies. *Energy Policy* **86**, 198–218 (2015).
- [10] Williams, E., Hittinger, E., Carvalho, R. & Williams, R. Wind power costs expected to decrease due to technological progress. *Energy Policy* **106**, 427–435 (2017).
- [11] Hayashi, D., Huenteler, J. & Lewis, J. I. Gone with the wind: A learning curve analysis of china’s wind power industry. *Energy Policy* **120**, 38–51 (2018).
- [12] Schauf, M. & Schwenen, S. Mills of progress grind slowly? estimating learning rates for onshore wind energy.
- [13] Ziegler, M. S. & Trancik, J. E. Re-examining rates of lithium-ion battery technology improvement and cost decline. *Energy and Environmental Science* (2021).
- [14] Kittner, N., Lill, F. & Kammen, D. M. Energy storage deployment and innovation for the clean energy transition. *Nature Energy* **2**, 1–6 (2017).
- [15] Schmidt, O., Hawkes, A., Gambhir, A. & Staffell, I. The future cost of electrical energy storage based on experience rates. *Nature Energy* **6**, 17110 (2017).
- [16] Schoots, K., Ferioli, F., Kramer, G. J. & van der Zwaan, B. C. C. Learning curves for hydrogen production technology: An assessment of observed cost reductions. *International Journal of Hydrogen Energy* **33**, 2630–2645 (2008).
- [17] Krishnan, S., Fairlie, M., Andres, P., de Groot, T. & Kramer, G. J. Power to gas (h2): Alkaline electrolysis. In *Technological Learning in the Transition to a Low-Carbon Energy System: Conceptual Issues, Empirical Findings, and Use in Energy Modeling*, 165–187 (Elsevier Inc, 2019).
- [18] Way, R., Ives, M. C., Mealy, P. & Farmer, J. D. Empirically grounded technology forecasts and the energy transition. *Joule* (2022).
- [19] Rivera-Tinoco, R., Schoots, K. & van der Zwaan, B. Learning curves for solid oxide fuel cells. *Energy Conversion and Management* **57**, 86–96 (2012).
- [20] Proost, J. State-of-the art capex data for water electrolyzers, and their impact on renewable hydrogen price settings. *International Journal of Hydrogen Energy* **44**, 4406–4413 (2019).

- [21] Saba, S. M., Müller, M., Robinius, M. & Stolten, D. The investment costs of electrolysis – a comparison of cost studies from the past 30 years. *International Journal of Hydrogen Energy* **43**, 1209–1223 (2018).
- [22] Glenk, G. & Reichelstein, S. Economics of converting renewable power to hydrogen. *Nature Energy* **4**, 216–222 (2019).
- [23] Schmidt, O. *et al.* Future cost and performance of water electrolysis: An expert elicitation study. *International Journal of Hydrogen Energy* **42**, 30470–30492 (2017).
- [24] Whiston, M. M. *et al.* Expert assessments of the cost and expected future performance of proton exchange membrane fuel cells for vehicles. *Proceedings of the National Academy of Sciences of the United States of America* **116**, 4899–4904 (2019).
- [25] Whiston, M. M. *et al.* Meeting u.s. solid oxide fuel cell targets. *Joule* **3**, 2060–2065 (2019).
- [26] Buttler, A. & Spliethoff, H. Current status of water electrolysis for energy storage, grid balancing and sector coupling via power-to-gas and power-to-liquids: A review. *Renewable and Sustainable Energy Reviews* **82**, 2440–2454 (2018).
- [27] IRENA. *Green Hydrogen Cost Reduction: Scaling up Electrolysers to Meet the 1.5C Climate Goal* (2020). URL <https://bit.ly/3azbSDT>.
- [28] BloombergNEF. Hydrogen: The economics of production from renewables.
- [29] Mayyas, A., Ruth, M., Pivovar, B., Bender, G. & Wipke, K. Manufacturing cost analysis for proton exchange membrane water electrolyzers. URL <https://bit.ly/31B0fT5>.
- [30] Ayers, K. *et al.* Perspectives on low-temperature electrolysis and potential for renewable hydrogen at scale. *Annual Review of Chemical and Biomolecular Engineering* **10**, 219–239 (2019).
- [31] Hauch, A. *et al.* Recent advances in solid oxide cell technology for electrolysis. *Science* **370** (2020).
- [32] Wood Mackenzie. Us energy storage monitor 2018 year in review.
- [33] Wright, T. P. Factors affecting the cost of airplanes. *Journal of the Aeronautical Sciences* **3**, 122–128 (1936).
- [34] Glenk, G. & Reichelstein, S. Reversible power-to-gas systems for energy conversion and storage. *Nature Communications* **13**, 2010 (2022).
- [35] Hodges, A. *et al.* A high-performance capillary-fed electrolysis cell promises more cost-competitive renewable hydrogen. *Nature Communications* **13**, 1304 (2022).

- [36] Wenske, M. Wasserstoff – herstellung per elektrolyse (2008). URL <https://bit.ly/3DLOWB4>.
- [37] Ceres and shell sign agreement for green hydrogen (28.06.2022). URL <https://bit.ly/3f8V1w3>.
- [38] Smolinka, T., Nikolai Wiebe, Philip Sterchele & Franz Lehner, Steffen Kiemel, Robert Mieke, Sylvia Wahren, & Fabian Zimmermann. Studie indwede industrialisierung der wasserelektrolyse in deutschland: Chancen und herausforderungen für nachhaltigen wasserstoff für verkehr, strom und wärme: Now (2018).
- [39] Bertuccioli, L. *et al.* Study on development of water electrolysis in the eu.
- [40] Götz, M. *et al.* Renewable power-to-gas: A technological and economic review. *Renewable Energy* **85**, 1371–1390 (2016).
- [41] Steinmüller, H. *et al.* Endbericht - power to gas - eine systemanalyse (2014). URL <https://bit.ly/3dAHE8v>.
- [42] Tractebel. Study on early business cases for h2 in energy storage and more broadly power to h2 applications. URL <https://bit.ly/3xG33nJ>.
- [43] Sørensen, B. *et al.* Hydrogen as an energy carrier: Scenarios for future use of hydrogen in the danish energy system. *International Journal of Hydrogen Energy* **29**, 23–32 (2004).
- [44] Ainscough, C., Peterson, D. & Miller, E. Hydrogen production cost from pem electrolysis.
- [45] Brynolf, S., Taljegard, M., Grahn, M. & Hansson, J. Electrofuels for the transport sector: A review of production costs. *Renewable and Sustainable Energy Reviews* **81**, 1887–1905 (2018).
- [46] Recharge. Green hydrogen project pipeline hits 134gw by 2030, but six times more needed to be on track for net zero: Iea **2022** (26.09.2022). URL <https://bit.ly/3UZ0bwm>.
- [47] Baker, D. R. A green hydrogen economy depends on this little-known machine (22.07.2022). URL <https://bit.ly/3Us8FvC>.
- [48] ReThink Energy. The swelling pipeline of electrolyzer gigafactories. URL <https://bit.ly/3DIyKA0>.
- [49] Odenweller, A., Ueckerdt, F., Nemet, G. F., Jensterle, M. & Luderer, G. Probabilistic feasibility space of scaling up green hydrogen supply. *Nature Energy* (2022).
- [50] Glenk, G. & Reichelstein, S. Synergistic value in vertically integrated power-to-gas energy systems. *Production and Operations Management* **29**, 526–546 (2020).

- [51] Paraschiv, F., Erni, D. & Pietsch, R. The impact of renewable energies on eex day-ahead electricity prices. *Energy Policy* **73**, 196–210 (2014).
- [52] Wozabal, D., Graf, C. & Hirschmann, D. The effect of intermittent renewables on the electricity price variance. *OR Spectrum* **38**, 687–709 (2016).
- [53] Kök, A. G., Shang, K. & Yücel, S. Impact of electricity pricing policies on renewable energy investments and carbon emissions. *Management Science* **64**, 131–148 (2018).
- [54] Ketterer, J. C. The impact of wind power generation on the electricity price in germany. *Energy Economics* **44**, 270–280 (2014).
- [55] International Energy Agency. Net zero by 2050 - a roadmap for the global energy sector. URL <http://bit.ly/3AIGDni>.
- [56] 117th United States Congress. H.r.5376 - inflation reduction act of 2022 (ira): Public law no: 117-169 (16.08.2022). URL <http://bit.ly/3gxtnex>.
- [57] Graham, P., Hayward, J., James Foster & Lisa Havas. Gencost 2021-22: Final report. URL <https://bit.ly/3f1NlwF>.
- [58] IEA. Hydrogen projects database (2020).
- [59] IEA. Hydrogen projects database. URL <https://bit.ly/3fYVYIT>.
- [60] MIT. The future of coal: Options for a carbon-constrained world.
- [61] Government of Chile. National green hydrogen strategy (2020). URL <https://bit.ly/3mNxGS4>.
- [62] The European Commission. A hydrogen strategy for a climate-neutral europe (2020). URL <https://bit.ly/3valcaX>.
- [63] BMWi. The national hydrogen strategy (2020). URL <https://bit.ly/3DJo5m8>.
- [64] Government of France. Stratégie nationale pour le développement de l'hydrogène décarboné en france (2020). URL <https://bit.ly/2X6HGwG>.
- [65] Government of The Netherlands. Government strategy on hydrogen (2020). URL <https://bit.ly/3aCyjrT>.
- [66] Ministero Dello Sviluppo Economico. Strategia nazionale idrogeno (2021). URL <https://bit.ly/3DE0FP2>.
- [67] HM Government. Uk hydrogen strategy (2021). URL <https://bit.ly/3FMST7o>.

- [68] Scottish Government. Developing scotland’s hydrogen economy: statement by the energy minister (2021). URL <https://bit.ly/3iWZXUW>.
- [69] Government of Spain. Hydrogen roadmap: a commitment to renewable hydrogen (2020). URL <https://bit.ly/3vgyC5i>.
- [70] República Portuguesa. Portugal national hydrogen strategy (2020). URL <https://bit.ly/3BN0NhE>.
- [71] Ministry of Climate & Environment. 2030 polish hydrogen strategy (2021). URL <https://bit.ly/3v1Z2Tf>.
- [72] Energate Messenger. Österreich hat das potenzial zur wasserstoffnation (2021). URL <https://bit.ly/3FHJEfo>.
- [73] Newborough, M. & Cooley, G. Developments in the global hydrogen market: Electrolyser deployment rationale and renewable hydrogen strategies and policies. *Fuel Cells Bulletin* **2020**, 16–22 (2020).
- [74] EES. Planned electrolyzer capacity by 2030 (mw) (2021). URL <https://bit.ly/3iYPgkI>.
- [75] Recharge. Global green-hydrogen pipeline exceeds 250 gw - here’s the 27 largest gigawatt-scale projects (2020). URL <https://bit.ly/3BEhmJB>.
- [76] Argus. China hydrogen alliance seeks 100 gw renewable capacity (2021). URL <https://bit.ly/3mYh0fh>.
- [77] Aurora. Companies are developing over 200 gw of hydrogen electrolyser projects globally, 85% of which are in europe (2021). URL <https://bit.ly/2YPdPtD>.
- [78] Ursua, A., Gandia, L. M. & Sanchis, P. Hydrogen production from water electrolysis: Current status and future trends. *Proceedings of the IEEE* **100**, 410–426 (2012).
- [79] IEA. The future of hydrogen.
- [80] Michalski, J. *et al.* Hydrogen generation by electrolysis and storage in salt caverns: Potentials, economics and systems aspects with regard to the german energy transition. *International Journal of Hydrogen Energy* **42**, 13427–13443 (2017).
- [81] Steffen, B. Estimating the cost of capital for renewable energy projects. *Energy Economics* **88**, 104783 (2020).
- [82] Wiser, R. *et al.* Wind technologies market report. URL <https://emp.lbl.gov/wind-technologies-market-report>.

- [83] Tax Foundation. State corporate income tax rates and brackets for 2020 (2020).
- [84] U.S. IRS. Publication 946 (2019), how to depreciate property (2019). URL <https://www.irs.gov/publications/p946>.
- [85] Griddy. Pricing (2020). URL <http://bit.ly/382npZk>.
- [86] U.S. Department of Energy. Report on the status of the solid oxide fuel cell program.

Acknowledgments

We gratefully acknowledge financial support through the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) – Project-ID 403041268 – TRR 266 and the Joachim Herz Stiftung. Helpful comments were provided by Inês Azevedo, Stefanie Burgahn, Jacques de Chalendar, Rezvan Derayati, Katrin Gschwind, Rebecca Meier, Ekaterina Savchenko, John Weyant, Nikolas Wölfling, and colleagues at the University of Mannheim and Stanford University. We also thank Yadira Funk, Hannes Hahn, and Philipp Scherer for providing valuable assistance with data collection and visualization.

Author contributions

G.G. developed the research question. G.G. and P.H. both collected the data, reviewed the literature, and conducted the analyses. All three authors contributed to the writing of the paper.

Conflicts of interest

The authors declare no competing financial or non-financial interests.

Supplementary Information:

Advances in Power-to-Gas Technologies: Cost and Conversion Efficiency

Gunther Glenk, University of Mannheim and Massachusetts Institute of Technology,

Philip Holler, University of Mannheim,

Stefan Reichelstein, University of Mannheim, Stanford University, and Leibniz Centre
for European Economic Research

Supplementary Note 1. Learning Estimates by Cumulative Capacity

Supplementary Table 1 provides detailed results for our regression estimations of the constant elasticity learning curve in equation (1) in the main body of the paper. Learning estimates for the energy consumption of SOC electrolysis are not statistically significant due to the limited sample size. Yet, the results are consistent with industry estimates and anecdotal evidence from manufacturers.

Supplementary Table 1. Regression results for equation (1).

	System prices			Energy Consumption		
	Alkaline	PEM	SOC	Alkaline	PEM	SOC
β_0	8.1870*** (0.0952)	7.9849*** (0.0488)	7.8592*** (0.0865)	1.6876*** (0.0267)	1.7502*** (0.0202)	1.3262*** (0.0233)
β_1	-0.2466*** (0.0236)	-0.1910*** (0.0151)	-0.2641*** (0.0582)	-0.0232** (0.0070)	-0.0246*** (0.0064)	-0.0228 (0.0162)
$2\beta_1$	0.8429	0.8760	0.8327	0.9841	0.9831	0.9843
Adj. R^2	0.5069	0.6719	0.2432	0.0718	0.1507	0.0471
N	106	79	62	132	78	21

System prices are in 2020 \$US/kW and cumulative installed capacity is in MW. All values are logarithmized using the natural logarithm (ln). Entries in parentheses are standard errors. Key to statistical significance: *** ≤ 0.001 , ** ≤ 0.01 , * ≤ 0.05 .

Supplementary Note 2. Future Cumulative Installed Capacity

Our projections consider three alternative scenarios for the growth of cumulative installed electrolysis capacity over the coming decade. The first scenario (called “Past Growth”) assumes that the cumulative capacity of each considered technology continues to grow over the coming decade at the same average rate as in the past. As described in the main body of the paper, we estimate the past average growth rate of cumulative capacity for each technology based on a univariate regression for a constant elasticity model of the form:


$$\ln(Q_i) = \lambda_0 + \lambda_1 \cdot i + \epsilon_i, \tag{A6}$$

where ϵ_i denotes the idiosyncratic error term with $E[\epsilon_i] = 0 \forall i$. Accordingly, the cumulative installed capacity of a PtG technology is predicted to increase every year to e^{λ_1} of its value in the preceding year. The detailed regression results are provided in Supplementary Table 2, while an illustration is provided in Supplementary Figure 1.

Supplementary Table 2. Regression results for equation (A6).

	Alkaline	PEM	SOC
λ_0	-713.3481*** (72.1765)	-1137.7098*** (41.8446)	-831.4175*** (33.3476)
λ_1	0.3560*** (0.0359)	0.5655*** (0.0208)	0.4118*** (0.0165)
$e^{\lambda_1} - 1$	0.4276	0.7604	0.5095
Adj. R^2	0.8295	0.9775	0.9857
N	21	18	10

Cumulative installed capacity is in MW. Entries in parentheses are standard errors. Key to statistical significance: *** ≤ 0.001 , ** ≤ 0.01 , * ≤ 0.05 .

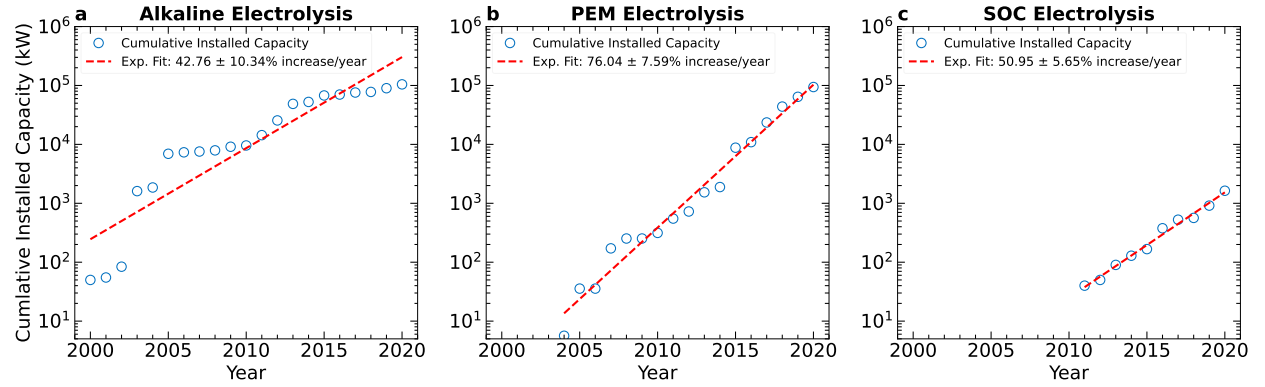

Supplementary Figure 1. Past development of cumulative installed capacity. **a, b, c** This figure shows the growth in cumulative installed capacity for **(a)** alkaline, **(b)** PEM, and **(c)** SOC electrolyzers. It also shows our estimates of the corresponding annual growth rates.

The second scenario (called “Policy Target”) assumes that cumulative installed electrolysis capacity will grow such that global installed capacity in the year 2030 meets an aggregate of policy targets. At the point of our analysis, the aggregate target amounts to about 115 GW and stems from the following national and supranational hydrogen strategies: Chile 25 GW⁶¹ and the European Union with 40 GW in Europe and 40 GW in its neighborhood, in particular North Africa⁶², where 36 GW are currently targeted to be built in France (6.5 GW), Germany (5.0 GW), Italy (5.0 GW), Scotland (5.0 GW), Spain (4.0 GW), the Netherlands (3.5 GW),

Portugal (2.25 GW), Poland (2 GW), Austria (1.5 GW), and Denmark (1.3 GW)^{63–73}.

Since the policy targets are technology-agnostic and specified for installed rather than cumulative installed capacity, we implement two adjustments. First, we assume that a technology’s share of the total cumulative installed capacity in 2030 is equal to the share the technology obtains in the Past-Growth scenario for 2030. Given the observed cumulative capacity for each electrolysis technology in 2020 and our estimate of installed capacity in 2030, we then interpolate the exponential growth in capacity installation required for the years 2021–2029. In addition, we account for potential capacity depletion by adding for each year from 2021–2030 the amount of installed capacity that is expected to have gone offline until that year based on the installation year and the useful lifetime assumed in our calculations. Yet, these additions are small relative to the growth required to reach the overall target in 2030.


Supplementary Table 3. Estimates of cumulative installed capacity by 2030.

in %	Alkaline	PEM	SOC	Total
Past Growth	3,670	26,898	100	30,688
Policy Target	13,772	100,861	376	115,009
Policy Target (less PEM)	45,002	68,221	1,787	115,009
Industry Target	29,682	217,458	812	247,952
Industry Target (less PEM)	110,143	133,362	4,446	247,952

Our third scenario (called “Industry Target”) is directly analogous to the second scenario with the exception that the aggregate target in 2030 stems from announcements by project developers, hydrogen customers, and hydrogen industry associations. The aggregate target currently amounts to about 248 GW of capacity that is planned to be installed by 2030 in the following countries: China 100 GW, Spain 72 GW, Australia 27 GW, the Netherlands 8 GW, Oman 6.7 GW, Germany 6.5 GW, Greece 5.0 GW, Denmark 3.6 GW, Brazil 3.4 GW, Chile 3.0 GW, the United Kingdom 2.1 GW, Ireland, 1.6 GW, Romania 1.6 GW, Sweden 1.5 GW, Belgium 1.2 GW, France 1.2 GW, Portugal 1.1 GW, Norway 1.0 GW, Italy 0.8 GW, Poland 0.3 GW, Bulgaria 0.2 GW, and other countries in the European Union 0.4 GW^{74–77}. In case targets for installed capacity in 2030 were given in a range, we converted these to the arithmetic mean of the lowest and highest targets in the range. All included announcements for installed capacity have a scheduled completion date before 2030.

Some industry observers argue that the growth in PEM installations over the coming

years might be slower than in the past because of shortages of rare earth materials and bans on fluoroc coatings, which are expected in some jurisdictions, including the European Union. To examine this possibility, we analyze variants of the Policy and Industry Target scenarios. Here, we assume that each technology will obtain the same cumulative installed capacity in 2030 as in the Past-Growth scenario. The remaining growth in capacity required to reach the policy (or industry) target is then equally distributed between alkaline and PEM electrolysis, where each one obtains a share of 49%. SOC technology is assumed to obtain the remaining share of 2%, representing the relative youth of the technology. The resulting estimates for the alternative scenarios in cumulative installed capacity are provided in Supplementary Table 3. The corresponding projections for the trajectories of system prices and conversion efficiency are provided in Supplementary Figure 2.

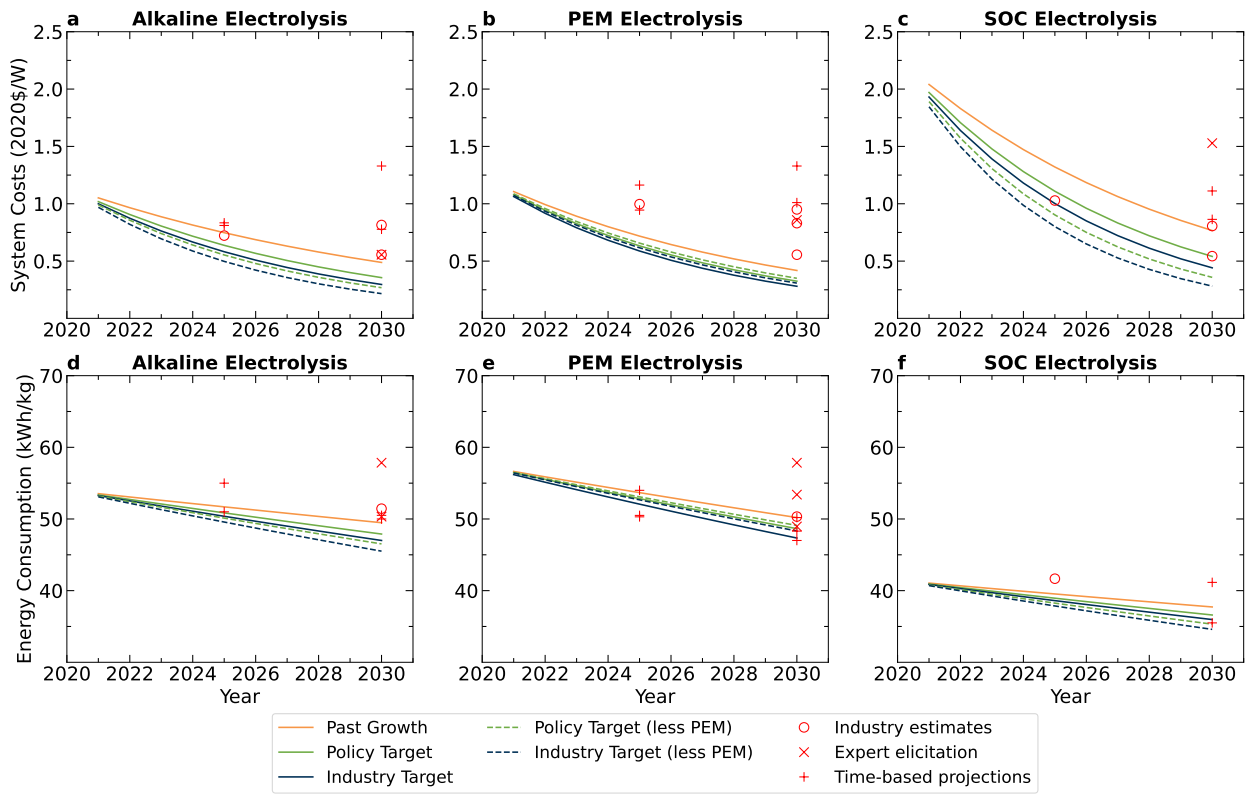

Supplementary Figure 2. Prospects for system prices and efficiency (all scenarios). a, b, c, d, e, f This figure shows our projections of the potential development of system prices in 2020 \$US for (a) alkaline, (b) PEM, and (c) SOC electrolyzers. It also shows our projections of the potential trajectory of energy consumption for (d) alkaline, (e) PEM, and (f) SOC electrolyzers.

Supplementary Note 3. The Effect of System Sizes

Earlier work suggests that the system prices of a PtG facility decline at a diminishing rate as the capacity size of the system increases^{20;21;26}. To examine the potential effect of changes in the size of PtG systems on the trajectory of system prices in our data set, let S_i denote the system size in kW of peak power absorption for a particular technology in year i . The functional specification of the extended constant elasticity learning curve in logarithmic form is then given by:

$$\ln(v_i) = \beta_0 + \beta_1 \cdot \ln(Q_i) + \beta_2 \cdot \ln(S_i) + \mu_i, \quad (\text{A7})$$

where β_2 denotes the size elasticity and μ_i the idiosyncratic error term with $E[\mu_i|Q_i, S_i] = 0 \forall i$. As such, the system prices of a PtG technology is estimated to decline with every doubling of system sizes to $2^{\beta_2}\%$ of its previous value.

Our data set on S_i results from our reviews on system prices, energy efficiency, and installed capacity. In total, we gather 125 observations for alkaline system sizes, 114 for PEM, and 18 for SOC^{26;58;78}. However, most of these observations are disconnected from our data on system prices. Specifically, only 13 size observations for alkaline and 8 size observations for PEM electrolyzers are connected to information on system prices.

Supplementary Table 4. Regression results for equation (A7) (specification 1)

	System Prices		
	Alkaline	PEM	SOC
β_0	8.0645*** (0.1274)	8.0690*** (0.2636)	7.5712*** (0.5067)
β_1	-0.2821*** (0.0341)	-0.2141*** (0.0256)	-0.3072*** (0.0948)
β_2	0.0383 (0.0267)	-0.0021 (0.0460)	0.0571 (0.0990)
2^{β_1}	0.8224	0.8621	0.8082
2^{β_2}	1.0269	0.9986	1.0404
Adj. R^2	0.5120	0.7363	0.2347
N	106	79	62

System prices are in 2020 \$US/kW, cumulative installed capacity is in MW, system sizes are in MW. All values are logarithmized using the natural logarithm (ln). Entries in parentheses are standard errors. Key to statistical significance: *** ≤ 0.001 , ** ≤ 0.01 , * ≤ 0.05 .

Given the data limitations, we implement three different specifications to investigate the potential impact of changes in system sizes on system prices. First, we estimate equation (A7) for each technology with S_i given as the annual average system size of the technology. The

resulting regression estimates are shown in Supplementary Table 4. Differences between our learning estimates, β_1 , in Supplementary Tables 1 and 4 are small. In addition, the estimated coefficients for size, β_2 , are close to zero and statistically insignificant. For alkaline and SOC, they are even positive. We attribute the results to the set of system prices available to us, which includes in all sample years ranges of price estimates that are likely to originate to some extent from different capacity sizes.

Some of our data sources^{26;78} provide ranges for system sizes with corresponding ranges for system prices. In the second specification, we first assume that the largest (smallest) system size in the size range of a data source corresponds to the lowest (highest) system price per kW in the cost range. We then interpolate the two ranges following the notion that larger systems entail lower system prices per kW. This procedure yields 18 additional pairs of system prices and sizes for alkaline and 11 additional pairs for PEM electrolyzers. We replace the average annual system size with the interpolated values for these pairs and add them to our initial pairs of system prices and sizes. We then estimate (A7) again for all technologies.

Supplementary Table 5. Regression results for equation (A7) (specification 2)

	System Prices		
	Alkaline	PEM	SOC
β_0	8.2610*** (0.1159)	8.3115*** (0.1508)	7.6049*** (0.4153)
β_1	-0.2254*** (0.0303)	-0.1977*** (0.0173)	-0.3018*** (0.0839)
β_2	-0.0233 (0.0209)	-0.0461 (0.0260)	0.0510 (0.0814)
2^{β_1}	0.8554	0.8720	0.8113
2^{β_2}	0.9840	0.9685	1.0360
Adj. R^2	0.5081	0.7467	0.2355
N	106	79	62

System prices are in 2020 \$US/kW, cumulative installed capacity is in MW, system sizes are in MW. All values are logarithmized using the natural logarithm (ln). Entries in parentheses are standard errors. Key to statistical significance: *** ≤ 0.001 , ** ≤ 0.01 , * ≤ 0.05 .

Supplementary Table 5 provides the regression results for the second specification. Again, we find no statistically or economically significant parameter estimates for the size coefficient. Meanwhile, the learning estimates for each technology are close to those reported in Figure 1. This finding is consistent with analog studies examining the cost dynamics of other clean

energy technologies.

Finally, we compare a specification in which we use only the direct matches and interpolated data, which is intended to produce significant size estimators. Consequently, we exclude all data points with matched yearly average system sizes and remain with our original and interpolated pairs only. We employ this specification to assess the impact of a theoretically significant size estimator on our learning parameters. Due to no available data for SOC, we can only carry out this analysis for alkaline and PEM. We find that alkaline electrolyzers exhibit a $2^{\beta_1} = 84.5\%$ learning curve from cumulative installed capacity and a reduction of $1 - 2^{\beta_2} = 5.5\%$ with every doubling of system sizes (Supplementary Table 6). PEM electrolyzers, in contrast, show an 83.2% learning curve from cumulative installed capacity and a reduction of 7.4% from system sizes. The learning curves for both alkaline and PEM technology are close to those reported in Figure 1, even though the regressions are based on a much smaller data set.

Supplementary Table 6. Regression results for equation (A7) (specification 3)

	System Prices		
	Alkaline	PEM	SOC
β_0	8.8281*** (0.2369)	8.8914*** (0.2499)	-
β_1	-0.2451*** (0.0544)	-0.2644*** (0.0398)	-
β_2	-0.0809** (0.0247)	-0.1106* (0.0336)	-
2^{β_1}	0.8438	0.8325	-
2^{β_2}	0.9455	0.9262	-
Adj. R^2	0.5760	0.7207	-
N	32	19	-

System prices are in 2020 \$US/kW, cumulative installed capacity is in MW, system sizes are in MW. All values are logarithmized using the natural logarithm (ln). Entries in parentheses are standard errors. Key to statistical significance: *** ≤ 0.001 , ** ≤ 0.01 , * ≤ 0.05 .

Supplementary Note 4. The Effect of Precious Metal Prices

Some components of PEM electrolyzer systems, such as the electrodes, bipolar plates, and porous transportation layers, so far require the precious metals platinum and iridium^{27;79}. To examine the potential effect of a change in the market prices of either metal, let $Platinum_i$ and $Iridium_i$ denote the respective global annual average market prices in year i and β_3 and β_4 the corresponding regression coefficients. The logarithmic form of the extended learning curve is then given by:

$$\ln(v_i) = \beta_0 + \beta_1 \cdot \ln(Q_i) + \beta_3 \cdot Platinum_i + \beta_4 \cdot Iridium_i + \mu_i, \quad (\text{A8})$$

where μ_i is again assumed to have a zero mean and to be uncorrelated with the independent variables.

Market prices for both metals are taken from www.platinum.matthey.com. Supplementary Table 7 provides detailed regression results. Similar to before, we find that the differences between our learning estimates, β_1 , in Supplementary Tables 1 and 7 are relatively small. At the same time, the estimated coefficients for both metals are economically insignificant.

Supplementary Table 7. Regression results for equation (A8).

System prices	
β_0	8.2219*** (0.2333)
β_1	-0.1957*** (0.0210)
β_3	0.0000 (0.0002)
β_4	-0.0002 (0.0001)
$2\beta_1$	0.8731
Adj. R^2	0.7390
N	79


System prices are in 2020 \$US/kW, cumulative installed capacity is in MW, platinum and iridium prices are in 2020 \$US/ounce. Entries in parentheses are standard errors. Key to statistical significance: *** ≤ 0.001 , ** ≤ 0.01 , * ≤ 0.05 .

Supplementary Note 5. Learning Estimates and Projections by Time

A common alternative to learning curves based on cumulative installed capacity is the estimation of technological progress as a function of time. To that end, we now estimate the development of system prices by means of a univariate regression for a constant elasticity model of the form:

$$\ln(v_i) = \lambda_0 + \lambda_1 \cdot i + \epsilon_i, \quad (\text{A9})$$

where ϵ_i denotes the idiosyncratic error term with $E[\epsilon_i] = 0 \forall i$. Accordingly, the system prices of a PtG technology are predicted to fall every year to e^{λ_1} of its value in the preceding year. Our estimation of the changes in a technology's energy consumption is again symmetric.

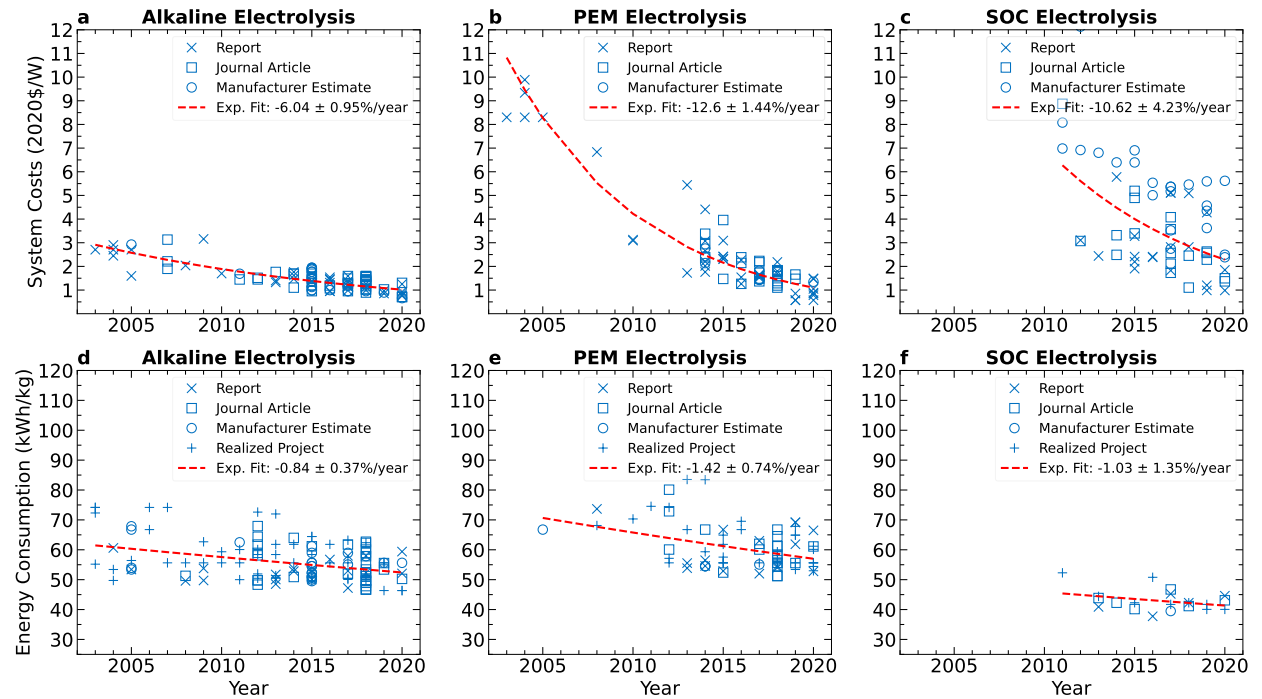

Supplementary Figure 3. Dynamics of system prices and efficiency over time. a, b, c, d, e, f This figure shows the trajectory of system prices in 2020 \$US and our estimates of the corresponding annual price decline for (a) alkaline, (b) PEM, and (c) SOC electrolyzers. It also shows the development of the energy consumption and our estimate of the corresponding annual improvement for (d) alkaline, (e) PEM, and (f) SOC electrolyzers.

Supplementary Figure 3a–c shows the system prices of the three electrolysis technologies and our estimates of the corresponding annual price decline. For alkaline electrolyzers, the reduction in system prices across the years 2003–2020 corresponds to an annual decline of $1 - e^{\lambda_1} = 6.0\%$ with a 95%-confidence interval of 1.0% ($p < 0.0001$, adj. $R^2 = 0.56$). In contrast, SOC electrolyzers exhibit a price decline between 2011–2020 described by an annual

reduction of $10.6 \pm 4.2\%$ ($p < 0.0001$, adj. $R^2 = 0.25$). PEM electrolyzers show a similarly rapid decline in system prices across 2003–2020 of $12.6 \pm 1.4\%$ ($p < 0.0001$, adj. $R^2 = 0.77$). See Supplementary Table 8 for details.

Supplementary Figure 3d–f shows the changes in energy consumption and our estimates of the annual improvement. We find that the improvement in energy consumption of alkaline systems across the years 2000–2020 corresponds to an annual increase of $0.8 \pm 0.4\%$ ($p < 0.0001$, adj. $R^2 = 0.11$). In contrast, SOC electrolyzers show an annual improvement between 2011–2020 of $1.0 \pm 1.4\%$ ($p < 0.15$, adj. $R^2 = 0.07$). PEM electrolyzers display an annual increase across 2005–2020 of $1.4 \pm 0.7\%$ ($p < 0.0001$, adj. $R^2 = 0.15$).

Supplementary Table 8. Regression results for equation (A9).

	System Prices			Energy Consumption		
	Alkaline	PEM	SOC	Alkaline	PEM	SOC
λ_0	132.7101*** (10.3038)	279.1588*** (16.8381)	234.6324*** (48.9072)	17.9059*** (3.9154)	30.5509*** (7.6656)	22.2568*** (13.1918)
λ_1	−0.0623*** (0.0051)	−0.1347*** (0.0084)	−0.1123*** (0.0243)	−0.0081*** (0.0019)	−0.0143*** (0.0038)	−0.0104*** (0.0065)
e^{λ_1}	0.9396	0.8740	0.8740	0.9916	0.9858	0.9897
Adj. R^2	0.5839	0.7686	0.2511	0.1139	0.1461	0.0703
N	106	79	62	132	78	21


System prices are in 2020 \$US/kW and time is given in years. Price values are logarithmized using the natural logarithm (ln). Entries in parentheses are standard errors. Key to statistical significance: *** ≤ 0.001 , ** ≤ 0.01 , * ≤ 0.05 .

We now use our estimates in Supplementary Figure 3 to project an alternative trajectory of future system prices and energy consumption for each PtG technology. As one would expect, the resulting trajectories for system prices and energy consumption shown in Supplementary Figure 4 are close, if not identical, to the previous trajectories corresponding to the Past-Growth scenario. As an exception to this, the time-based projection for system prices of PEM electrolyzers is closer to the trajectory of the Industry-Target scenarios. We attribute this discrepancy to a large share of lower price observations in recent years.

As a final robustness check, we examine a specification based on time and cumulative installed capacity. The bivariate constant elasticity functional form is given by:

$$\ln(v_i) = \beta_0 + \beta_1 \cdot \ln(Q_i) + \beta_2 \cdot i + \epsilon_i, \quad (\text{A10})$$

where ϵ_i denotes the idiosyncratic error term with $E[\epsilon_i|Q_i] = 0 \forall i$. The estimation of the changes in a technology’s energy consumption is again symmetric.

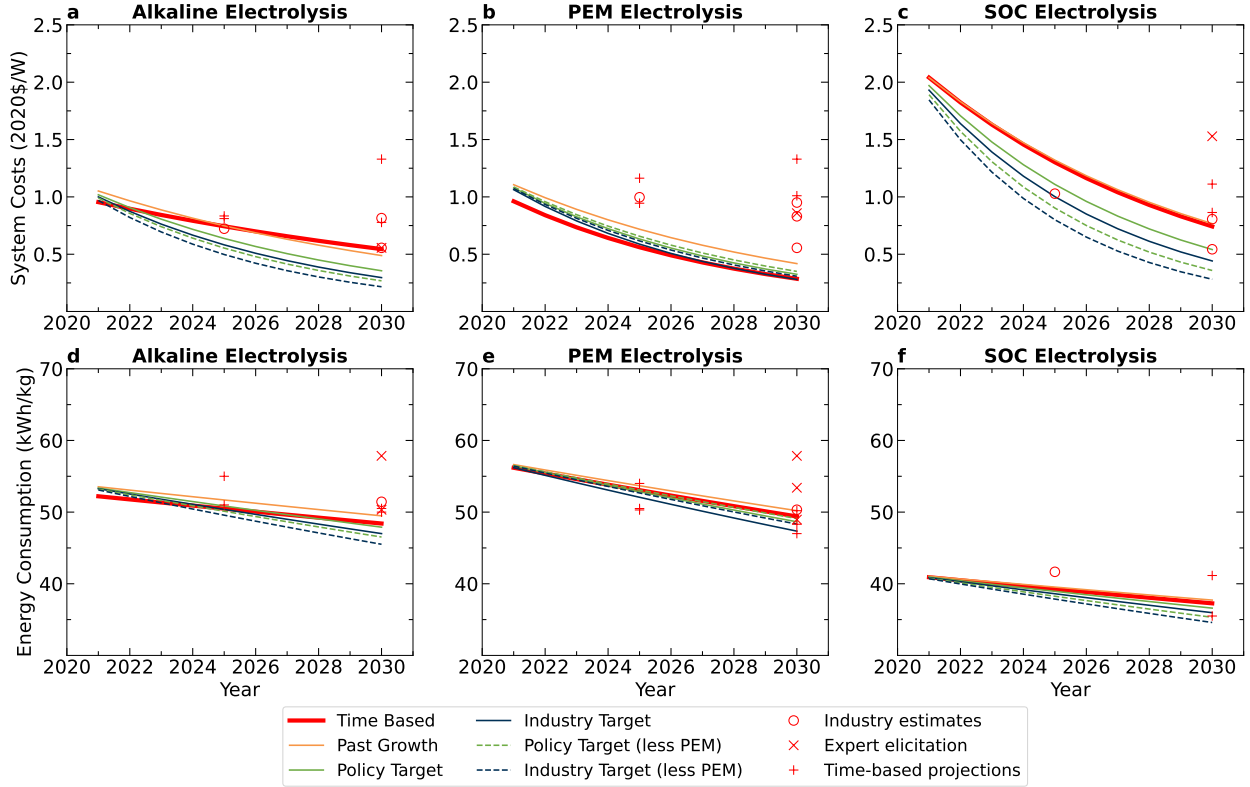

Supplementary Figure 4. Prospects for system prices and efficiency based on time. a, b, c, d, e, f This figure shows our time-based projections of the potential development of system prices in 2020 \$US for (a) alkaline, (b) PEM, and (c) SOC electrolyzers. It also shows our time-based projections of the potential trajectory of energy consumption for (d) alkaline, (e) PEM, and (f) SOC electrolyzers.

Supplementary Table 9. Regression results for equation (A10)

	System Prices			Energy Consumption		
	Alkaline	PEM	SOC	Alkaline	PEM	SOC
β_0	153.6344*** (32.8751)	405.2188** (121.1544)	313.6040 (376.1014)	29.9637*** (10.1289)	2.7511 (44.1837)	128.1963 (98.7539)
β_1	0.0468 (0.0698)	-0.1974 (0.0602)	0.0942 (0.4445)	0.0219 (0.0180)	-0.0238 (0.0372)	0.1295 (0.1196)
β_2	-0.0727*** (0.0164)	0.1029** (0.0979)	-0.1514 (0.1863)	-0.0141** (0.0051)	-0.0005 (0.0220)	-0.0628 (0.0489)
$2\beta_1$	1.0330	0.8721	1.0674	1.0153	0.9837	1.0939
e^{β_2}	0.9298	1.0739	0.8595	0.9860	0.9995	0.9391
Adj. R^2	0.5817	0.7689	0.2389	0.1275	0.1394	0.0786
N	106	79	62	132	78	21

System prices are in 2020 \$US/kW, cumulative installed capacity is in MW, average system sizes are in MW. All values are logarithmized using the natural logarithm (ln). Entries in parentheses are standard errors. Key to statistical significance: *** ≤ 0.001 , ** ≤ 0.01 , * ≤ 0.05 .

Supplementary Table 9 provides detailed regression results. For both system prices and energy consumption, the regression coefficients for cumulative installed capacity are now positive and statistically insignificant, while the coefficients for time are close to those reported in Supplementary Table 8. These results can be attributed to severe multicollinearity between the two independent variables. Specifically, alkaline electrolyzers exhibit a Pearson correlation coefficient of 0.95 and a variance inflation factor of 10.3. PEM systems show a Pearson correlation coefficient of 0.99 and a variance inflation factor of 52.0. Finally, SOC technology shows a Pearson correlation coefficient of 0.99 and a variance inflation factor of 58.1. Nevertheless, projected trajectories for system prices and energy consumption based on the regression estimates are close to the time-based projections reported in Supplementary Figure 4. As such, all scenarios and specifications in our calculations yield a consistent assessment of the magnitudes and trends in price and efficiency improvements.

Supplementary Note 6. Levelized Cost of Hydrogen

Supplementary Table 10 provides detailed inputs and outputs for our LCOH calculations.

Supplementary Table 10. Estimates of levelized cost of hydrogen by 2030.

in 2020 \$US	Source	Alkaline	PEM	SOC
General parameters				
Economic lifetime, T (years)	[1]	20	20	20
Cost of capital, r (%)	[2]	5.00	5.00	5.00
Corporate income tax rate, α (%)	[3]	21.00	21.00	21.00
Depreciation method (-)*	[4]	3	3	3
Degradation rate, x (%)	[7]	1.00	1.00	1.60
Avg. electricity buying price, $q(t)$ (\$/kWh)	[5]	0.0359	0.0359	0.0359
Past Growth				
System price, v (\$/kW)	[6]	475	352	767
Fixed operating cost, F_i (\$/kW)	[6]	12	11	23
Energy consumption, η^{-1} (kWh/kg)	[6]	49.48	49.84	37.72
Average optimized capacity factor, CF^* (%)		82.52	71.88	86.59
Levelized cost of hydrogen, $LCOH$ (\$/kg)		1.71	1.61	1.53
Policy Target				
System price, v (\$/kW)	[6]	340	263	536
Fixed operating cost, F_i (\$/kW)	[6]	9	8	16
Energy consumption, η^{-1} (kWh/kg)	[6]	47.86	48.21	36.58
Average optimized capacity factor, CF^* (%)		74.27	61.35	79.08
Levelized cost of hydrogen, $LCOH$ (\$/kg)		1.53	1.46	1.33
Policy Target (less PEM)				
System price, v (\$/kW)	[6]	256	288	358
Fixed operating cost, F_i (\$/kW)	[6]	6	9	11
Energy consumption, η^{-1} (kWh/kg)	[6]	46.51	48.72	35.31
Average optimized capacity factor, CF^* (%)		65.41	64.81	66.74
Levelized cost of hydrogen, $LCOH$ (\$/kg)		1.39	1.50	1.16
Industry Target				
System price, v (\$/kW)	[6]	284	225	441
Fixed operating cost, F_i (\$/kW)	[6]	7	7	13
Energy consumption, η^{-1} (kWh/kg)	[6]	47.00	47.34	35.96
Average optimized capacity factor, CF^* (%)		69.03	55.16	73.58
Levelized cost of hydrogen, $LCOH$ (\$/kg)		1.44	1.39	1.24
Industry Target (less PEM)				
System price, v (\$/kW)	[6]	205	249	282
Fixed operating cost, F_i (\$/kW)	[6]	5	7	8
Energy consumption, η^{-1} (kWh/kg)	[6]	45.51	47.91	35.12
Average optimized capacity factor, CF^* (%)		57.96	59.54	60.22
Levelized cost of hydrogen, $LCOH$ (\$/kg)		1.31	1.43	1.09

*3: 20-year 150%-declining balance; Sources: [1],⁸⁰ [2],^{81;82} [3],⁸³ [4],⁸⁴ [5], www.ercot.com,⁸⁵ [6], own analysis [7],^{26;28;86}.